


Spee-D Accessories Fabricated Cross and Grate

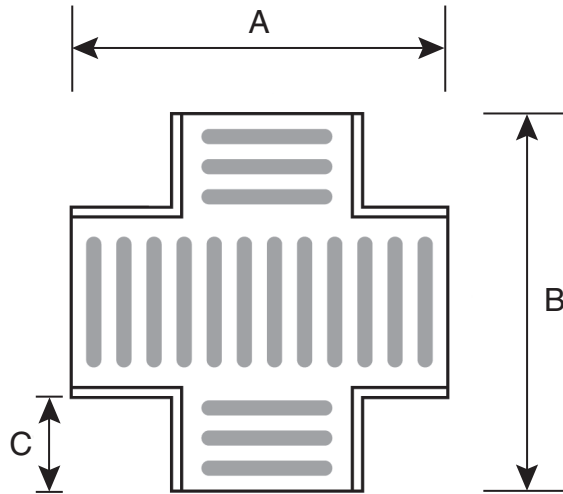

Dimension Key

- A: Width
- B: Height
- C: Height of branch
- D: Weight

*note: Please see catalog

Part Number	A	B	C	D
2360	9 3/8	9 3/8	2 1/4	3
2361	9 3/8	9 3/8	2 1/4	3
2362	9 3/8	9 3/8	2 1/4	3
2363	9 3/8	9 3/8	2 1/4	3
2364	9 3/8	9 3/8	2 1/4	3
2365	9 3/8	9 3/8	2 1/4	3

Load Recommendation Guide



Class A

- Loads of 1-60 psi.
- Recommended for pedestrians, bicycles and wheel chair traffic.



Class B

- Loads of 61-175 psi.
- Recommended for medium-duty pneumatic tire traffic, autos and light trucks at speeds less than 20 m.p.h.



Class C

- Loads of 176-325 psi.
- Recommended for heavy-duty pneumatic tire forklifts and tractor trailers at speeds less than 20 m.p.h., H-20 rated.



Class D

- Loads of 326-575 psi.
- Recommended for heavy-duty hard tire forklifts at speeds less than 20 m.p.h., H-20 rated.

Note: Some installations may require a concrete collar to meet load rating. Loads are based on encasing product in concrete. Product must be installed using NDS instructions.