


TUFFTRACK PRODUCT DESCRIPTION

PANEL SIZE - 24" x 24" x 1 1/2"

CELLS PER PANEL - (120) - 2-1/2" HEXAGONAL CELLS

NESTED HONEYCOMB CELL LAYOUT

COMPRESSIVE STRENGTH - 98,770 PSF
685 PSI
EXCEEDS H2O
LOADING

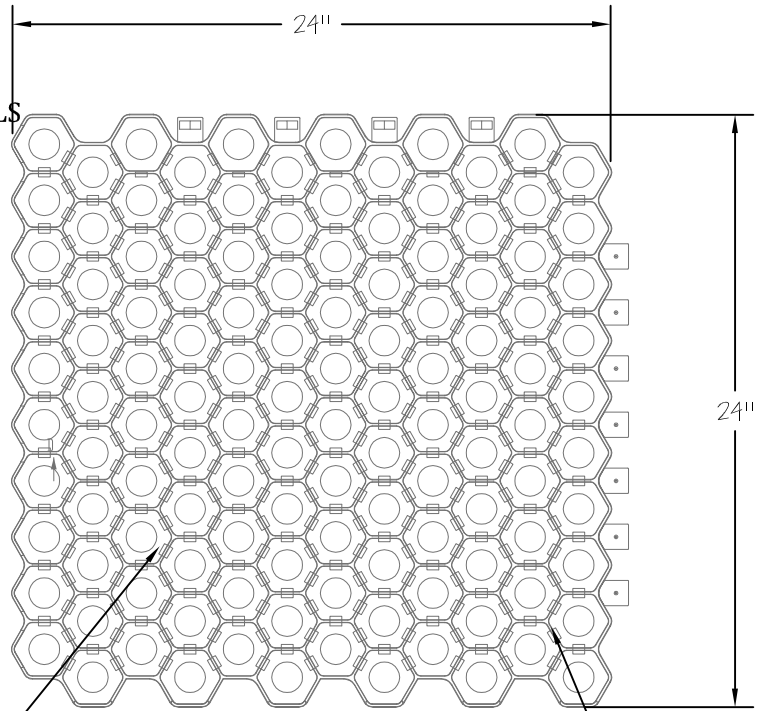

TONGUE & GROOVE LATCHING SYSTEM


TUFFTRACK GRASS ROAD PAVER

"SOD" PLANTING LEVELS INSIDE CELLS

ADJOINING FINISH GRADE

ACTUAL FINISH GRADE

SOIL FILL LEVEL INSIDE
PAVER GRIDWORK AFTER
HEAVY WATER DOWN.
THIS IS THE ACTUAL SOD
PLANTING LEVEL.

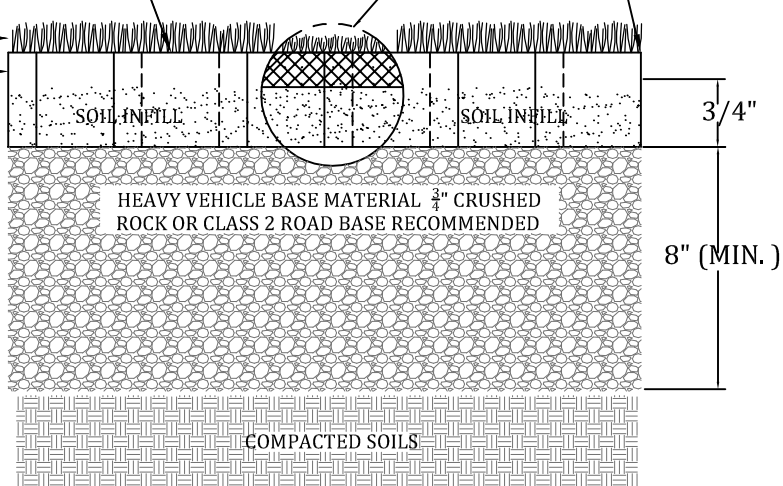

NOTE:

EXISTING SOILS SHOULD BE EVALUATED TO ENSURE
PROPER STRUCTURAL AND PERMEABILITY PROPERTIES.



TECHNICAL SERVICES
1-888-825-4716
techservice@ndspro.com

TYPICAL TUFFTRACK PAVER FIRELANE DETAIL